


Alarm Installation

HARDWARE FOR GS-ALARM

GuardshackEnclosures.com
(602) 426-1002
(800) 266-5411

NOTE:
ALARM WILL SOUND UNTIL THE ENCLOSURE IS SET DOWN IN PLACE, OR TURNED OFF WITH A KEY AT THE SWITCH LOCATED ON THE BOTTOM OF THE ALARM CASE BE SURE TO KEEP KEYS IN A SAFE PLACE AS THEY ARE THE ONLY WAY TO DISARM THE UNIT.

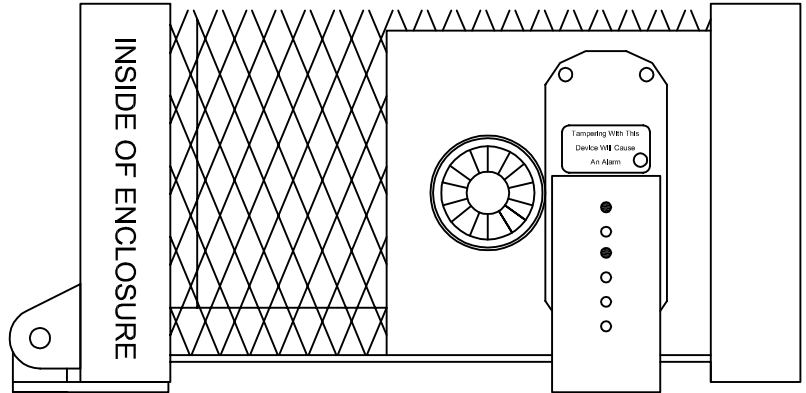

Qty	Hardware
①	2 1/4" HEX HEAD SCREW
②	2 1/4" x 1 1/2" LEAD ANCHOR
③	3 #10 x 1/2" ONE WAY SCREW
④	3 3/4" USS FLAT WASHER

⑤	2 #4 SHEET METAL SCREW
⑥	3 ALARM MAGNET
⑦	3 ALARM MAGNET STAND
⑧	4 #6 SHEET METAL SCREW
⑨	2 ALARM KEYS
⑩	1 ALARM STICKER

INSTALLATION

OPEN COVER AND INSTALL BATTERIES (1) AA AND (1) 9VOLT. CLOSE COVER AND TIGHTEN WITH SCREWS. PLACE ALARM INSIDE ENCLOSURE AGAINST THE ANGLE IRON. USE INCLUDED HARDWARE AS SHOWN IN THE DIAGRAM BELOW. DRILL SMALL PILOT HOLES MAKING SURE NOT TO DRILL THE ALARM OR SPEAKER. ATTACH MAGNET TO MAGNET STAND AT YOUR DESIRED HEIGHT. (THE HIGHER THE MAGNET IS MOUNTED THE HIGHER THE TRIP POINT FOR THE ALARM.) PLACE THE MAGNET STAND LEAVING A SMALL GAP BETWEEN THE ALARM AND STAND. MARK LOCATION OF HOLES AND DRILL 1/2" HOLE 1-3/4" DEEP FOR LEAD EXPANSION ANCHORS. ONCE INSTALLED TEST ALARM TO BE SURE IT IS WORKING PROPERLY.

